




**TEMPORARY PEDESTRIAN CROSSING**



**EXISTING PEDESTRIAN CROSSING**

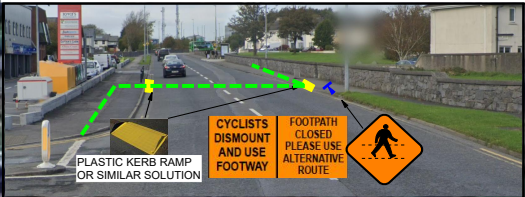

DESIGN PARAMETERS		
ROAD / WORKS CHARACTERISTICS		
Road Level	Roadworks Type	Speed Limit
1 (iii)	A	50
Single or Multi-Lane / Dual	Sign Size	
Single	600mm	
TEMPORARY SIGNS		
Sign Visibility	Number of Signs	Sign Spacing
50m	2	20m
MIN. RATE OF TAPER		
Taper at Lane	Taper At Hard Shoulder	Transition Length
1 in 5	1 in 5	N/A
SAFETY ZONES & LANE WIDTH		
Longitudinal Safety Zone	Lateral Safety Zone	Minimum Lane Width
5m	0.5m	3m
CONE SIZE & SPACING		
Minimum Cone Height	Spacing at Tapers	Longitudinal Spacing
750mm	3m	3m
LAMP SPACING		
Lamp Spacing at Tapers	Longitudinal Lamp Spacing	
6m	6m	

LEGEND	
	Sign Location
	Road Cones
	Works Area
	Diversion Route

**PROJECT INFORMATION**

Client: Comhairle Cathrach na Gaillimhe  
Galway City Council

Project: Ballybane Active Travel

Title: Rahylin Glebe Road Closure - Pedestrian Route

Dwg No: 01

Date: 11/09/2024 Rev: 00 Scale: N.T.S.

Drawn: \_\_\_\_\_ Checked: \_\_\_\_\_ Approved: \_\_\_\_\_

Atterhy, Co. Galway.  
Tel: 00353 (91) 844356 Fax: 00353 (91) 844519  
[www.coffeygroup.com](http://www.coffeygroup.com)

- All works to be carried out in accordance with the latest revisions of Chapter 8 of the Traffic Signs Manual and the Temporary Traffic Management Operations Guidance.
- The Temporary traffic management plan may only be implemented by a qualified Temporary Traffic Operations Supervisor (TOS). The TOS is to be in possession of the relevant CSCS signing lighting and guarding at road works card.
- TOS shall be available at all times when traffic management is in operation. Designated personnel to hold Health and Safety at Road Works CSCS card if applicable.
- Inspections of the traffic management layout are to be carried out on a daily basis to ensure the TM equipment has been set out as specified in the temporary traffic management plan (TTMP) and to ensure the TTMP is operating effectively.
- Maintenance of the traffic management equipment to be carried out on an on-going basis throughout the duration of the works.
- Sign faces shall be of retro-reflective material and the retro-reflectivity, colours, chromaticity and luminance factors shall be as specified in the TI Publication on Specification for Roadworks Series 1200 (CC-SPW-R/200) or any further amendments or replacement.
- Designated works access locations are to be clearly signposted using sign WK 052 as required. Exact location of access signage to be determined by the TOS on site, referring to Chapter 8 of the Traffic Signs Manual for usage.
- The layouts and diagrams shown in chapter 8 of the traffic signs manual are based on directing traffic through roadworks using delineators and safety zones rather than on the use of restraint systems. Safety barriers should only be used where the benefits outweigh the risks involved in their installation and use. Risk assessment to be undertaken by the relevant supervisor in relation to excavations in the vicinity of the existing roadway.
- It is envisaged that unobstructed access shall be maintained for the emergency services for the duration of the works. Should access be required to the site / works areas then this shall be via agreed site access points.
- Access to local residence and business properties to be maintained at all times and to be coordinated by the TOS on site.
- Pedestrian routes to be maintained during the works. Pedestrian routes to be coordinated by the TOS on site and signed accordingly.

Rev.	Date	Comment
00	11/09/2024	Original Issue

